

MODULAR ICE CUBE HEADS

The EQ Series solid ice cube maker with a vertically mounted evaporator are entirely made of stainless steel. They are characterized by their innovative, linear design and high reliability.

The ice is produced using a continuous stream of water which flows downwards and is uniformly distributed across a highly efficient vertical evaporator.

With their superior cooling performance and low production costs, solid square cubes offer the best solution for all situations where high ice consumption is needed.



Features

- Full stainless steel body
- Electronically controlled
- Technical support
- Machines from 150 kg available

- ✓ 10gm crystal clear hard ice cube
- ✓ Made in Italy
- ✓ Stainless steel body

EQ SERIES


ICE CUBE HEADS

Product Information



EQ150, EQ250, EQ400

EQ SERIES MODULAR

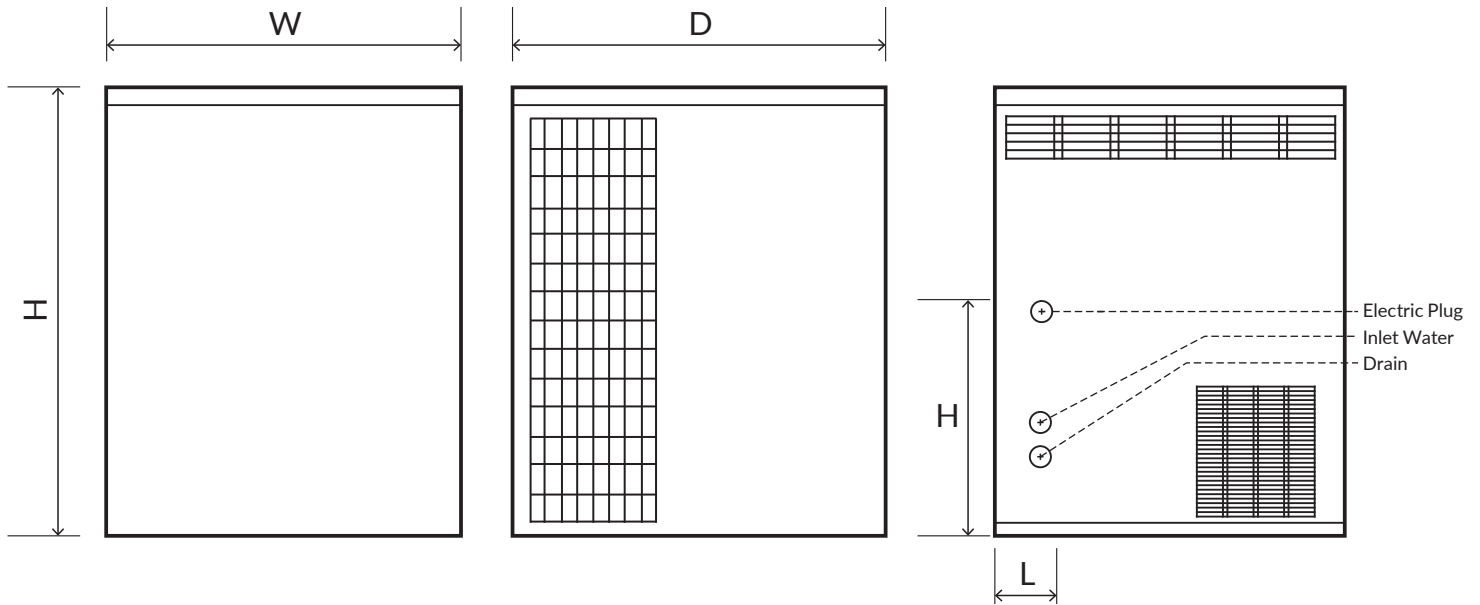

| | EQ 150 | EQ 250 | EQ 400 |
|--|-----------------------|-----------------------|-----------------------|
| Control System | E | E | E |
| Cooling System | A / W | A / W | A / W |
| Production in 24h (6gr or 10gr or 17gr cubes) | 150 kg | 250 kg | 400 kg |
| Production Per Cycle | 275/168/110 ice cubes | 370/234/140 ice cubes | 555/342/210 ice cubes |
| Voltage Standard | 220-240 V~ 50 Hz(*) | 220-240 V~ 50 Hz(*) | 220-240 V~ 50 Hz(*) |
| Power Consumption | 850 W | 1100 W | 2100 W |
| Type of Refrigerant | R 452 A | R 452 A | R 452 A |
| Dimensions (WxDxH) | 560x620x575 mm | 760x620x575 mm | 760x620x725 mm |
| Net Weight | 53 kg | 70 kg | 88 kg |

| | | | |
|-------------------------------|----------------|----------------|----------------|
| Packing Dimensions (WxDxH) | 630x690x720 mm | 830x690x720 mm | 830x690x870 mm |
| Gross weight | 65 kg | 85 kg | 106 kg |

| WATER-TEMPERATURE | 38°C | | | | | | Electrical Plug | | | Water Inlet | | | Water Drain | | |
|-------------------|------|------|------|------|------|-----|-----------------|-----|-----|-------------|------|------|-------------|----|----|
| | 70% | 65% | 60% | 55% | 50% | M | L | H | L | H | Ø | L | H | Ø | |
| | 32°C | 80% | 70% | 60% | 55% | 55% | 150 | 75 | 508 | 75 | 140 | 3/4" | 75 | 60 | 20 |
| 25°C | 90% | 80% | 70% | 60% | 60% | 250 | 75 | 508 | 75 | 140 | 3/4" | 75 | 60 | 20 | |
| 15°C | 100% | 100% | 80% | 70% | 65% | 450 | 75 | 668 | 75 | 140 | 3/4" | 75 | 60 | 20 | |
| 10°C | 105% | 100% | 90% | 80% | 70% | | | | | | | | | | |
| | 10°C | 21°C | 32°C | 38°C | 43°C | | | | | | | | | | |

AMBIENT-TEMPERATURE

